




## MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	230	HERTZ	50	R A T I N G	FRAME	4 INCH SUB	HP	0.333
	ST.MFD		RUN MFD	12.5		MODEL	254633	VOLTS	230-240
	TEST PR	8654	PAGE	1		RPM	2875	PHASE	1
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	PSC		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

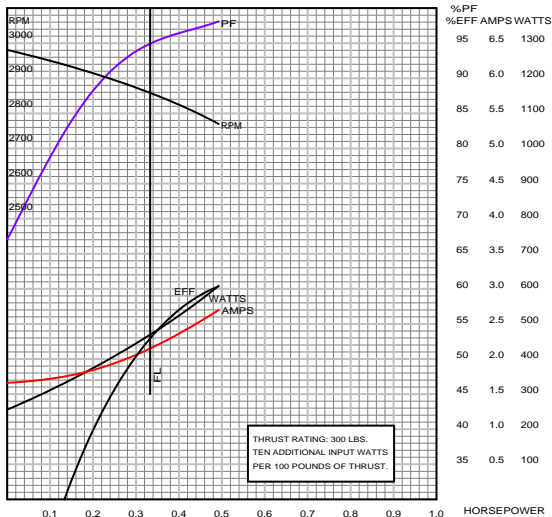

FULL LOAD TORQUE	7.3	LB-IN
BREAKDOWN TORQUE	20.9	LB-IN
LOCKED ROTOR TORQUE	7.0	LB-IN
LOCKED ROTOR AMPS	7.4	

CURVE NO. 331206-351