




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	240	HERTZ	50	R A T I N G	FRAME	4 INCH SUB	HP	0.75
	ST.MFD		RUN MFD	20		MODEL	254635	VOLTS	230-240
	TEST PR	8656	PAGE	1-A		RPM	2875	PHASE	1
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	PSC		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

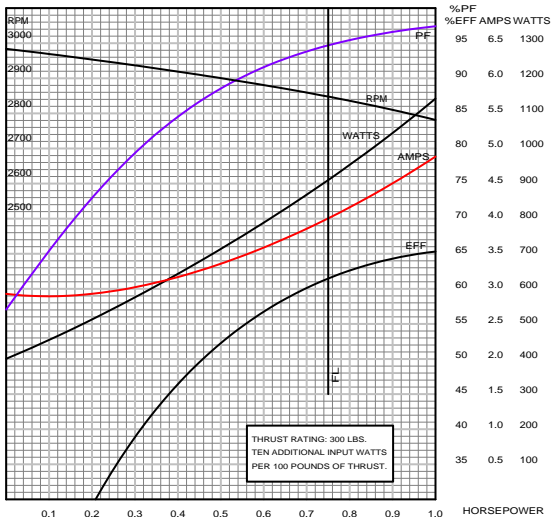

THRUST RATING: 300 LBS.
TEN ADDITIONAL INPUT WATTS
PER 100 POUNDS OF THRUST.

FULL LOAD TORQUE	16.6	LB-IN
BREAKDOWN TORQUE	41.1	LB-IN
LOCKED ROTOR TORQUE	12.5	LB-IN
LOCKED ROTOR AMPS	14.6	

CURVE NO. 331208-302