




## MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	240	HERTZ	50	R A T I N G	FRAME	4 INCH SUB	HP	1
	ST.MFD		RUN MFD	30		MODEL	254636	VOLTS	230-240
	TEST PR	8657	PAGE	1-A		RPM	2875	PHASE	1
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	PSC		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

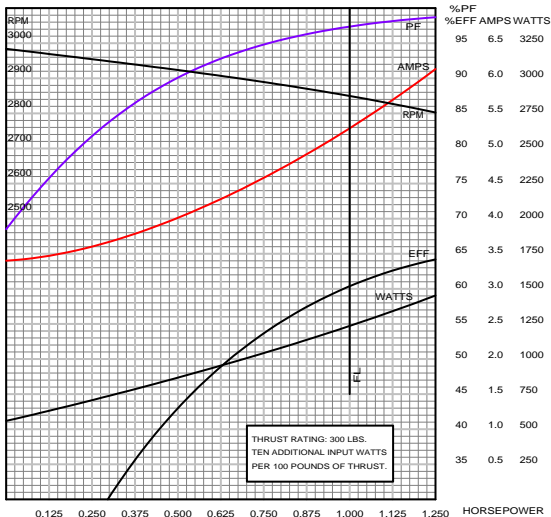

THRUST RATING: 300 LBS.  
TEN ADDITIONAL INPUT WATTS  
PER 100 POUNDS OF THRUST.

FULL LOAD TORQUE	22.1	LB-IN
BREAKDOWN TORQUE	54.2	LB-IN
LOCKED ROTOR TORQUE	19.1	LB-IN
LOCKED ROTOR AMPS	19.3	

CURVE NO. 331209-302