




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	240	HERTZ	50	R A T I N G	FRAME	4 INCH SUB	HP	1.5
	ST.MFD		RUN MFD	40		MODEL	254637	VOLTS	230-240
	TEST PR	8658	PAGE	1-A		RPM	2875	PHASE	1
	APPR BY		DATE			S.F.	1.00	HERTZ	50
						TYPE	PSC		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

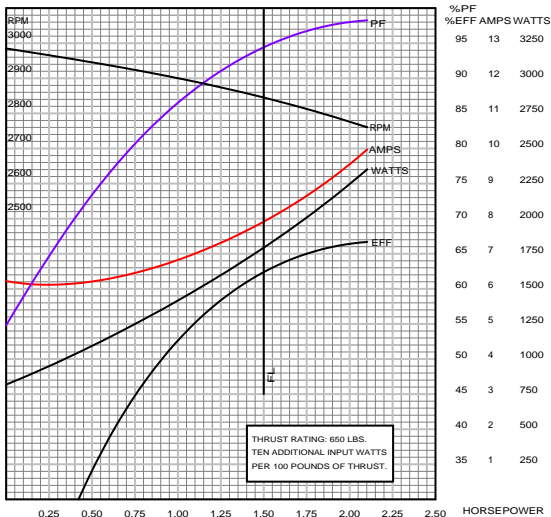

FULL LOAD TORQUE	33.2	LB-IN
BREAKDOWN TORQUE	76.0	LB-IN
LOCKED ROTOR TORQUE	25.0	LB-IN
LOCKED ROTOR AMPS	28.2	

CURVE NO. 331210-302