




MOTOR PERFORMANCE CHARACTERISTICS

| | | | | | | | | | |
|------------------|---------|------|---------|----|----------------------------|-------|------------|-------|---------|
| T E S T | VOLTS | 230 | HERTZ | 50 | R A T I N G | FRAME | 4 INCH SUB | HP | 3 |
| | ST.MFD | | RUN MFD | 70 | | MODEL | 254639 | VOLTS | 230-240 |
| | TEST PR | 8660 | PAGE | 1 | | RPM | 2875 | PHASE | 1 |
| | APPR BY | | DATE | | | S.F. | 1.00 | HERTZ | 50 |
| | | | | | | TYPE | PSC | | |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

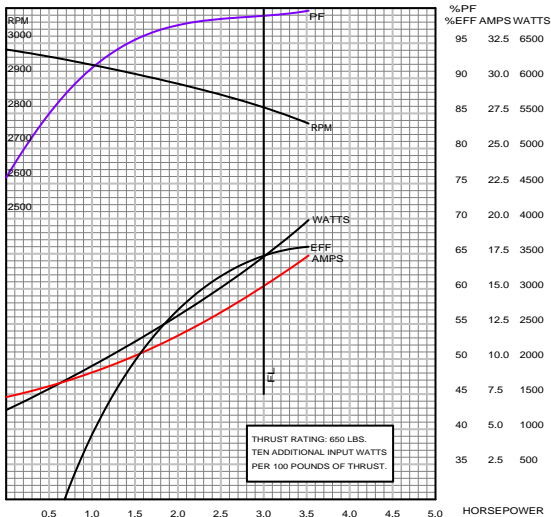

| | | |
|---------------------|------|-------|
| FULL LOAD TORQUE | 67.1 | LB-IN |
| BREAKDOWN TORQUE | 123 | LB-IN |
| LOCKED ROTOR TORQUE | 38.0 | LB-IN |
| LOCKED ROTOR AMPS | 51.0 | |

CURVE NO. 331212-352