




# MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS 415	HERTZ 50	<b>R A T I N G</b>	FRAME 4 INCH SUB	HP 7.5
	ST.MFD	RUN MFD		MODEL 234328	VOLTS 380-415
	TEST PR 8183	PAGE 6-A		RPM 2875	PHASE 3
	APPR BY MEM	DATE 8/12/97		S.F. 1.00	HERTZ 50
				TYPE 3 PHASE	

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

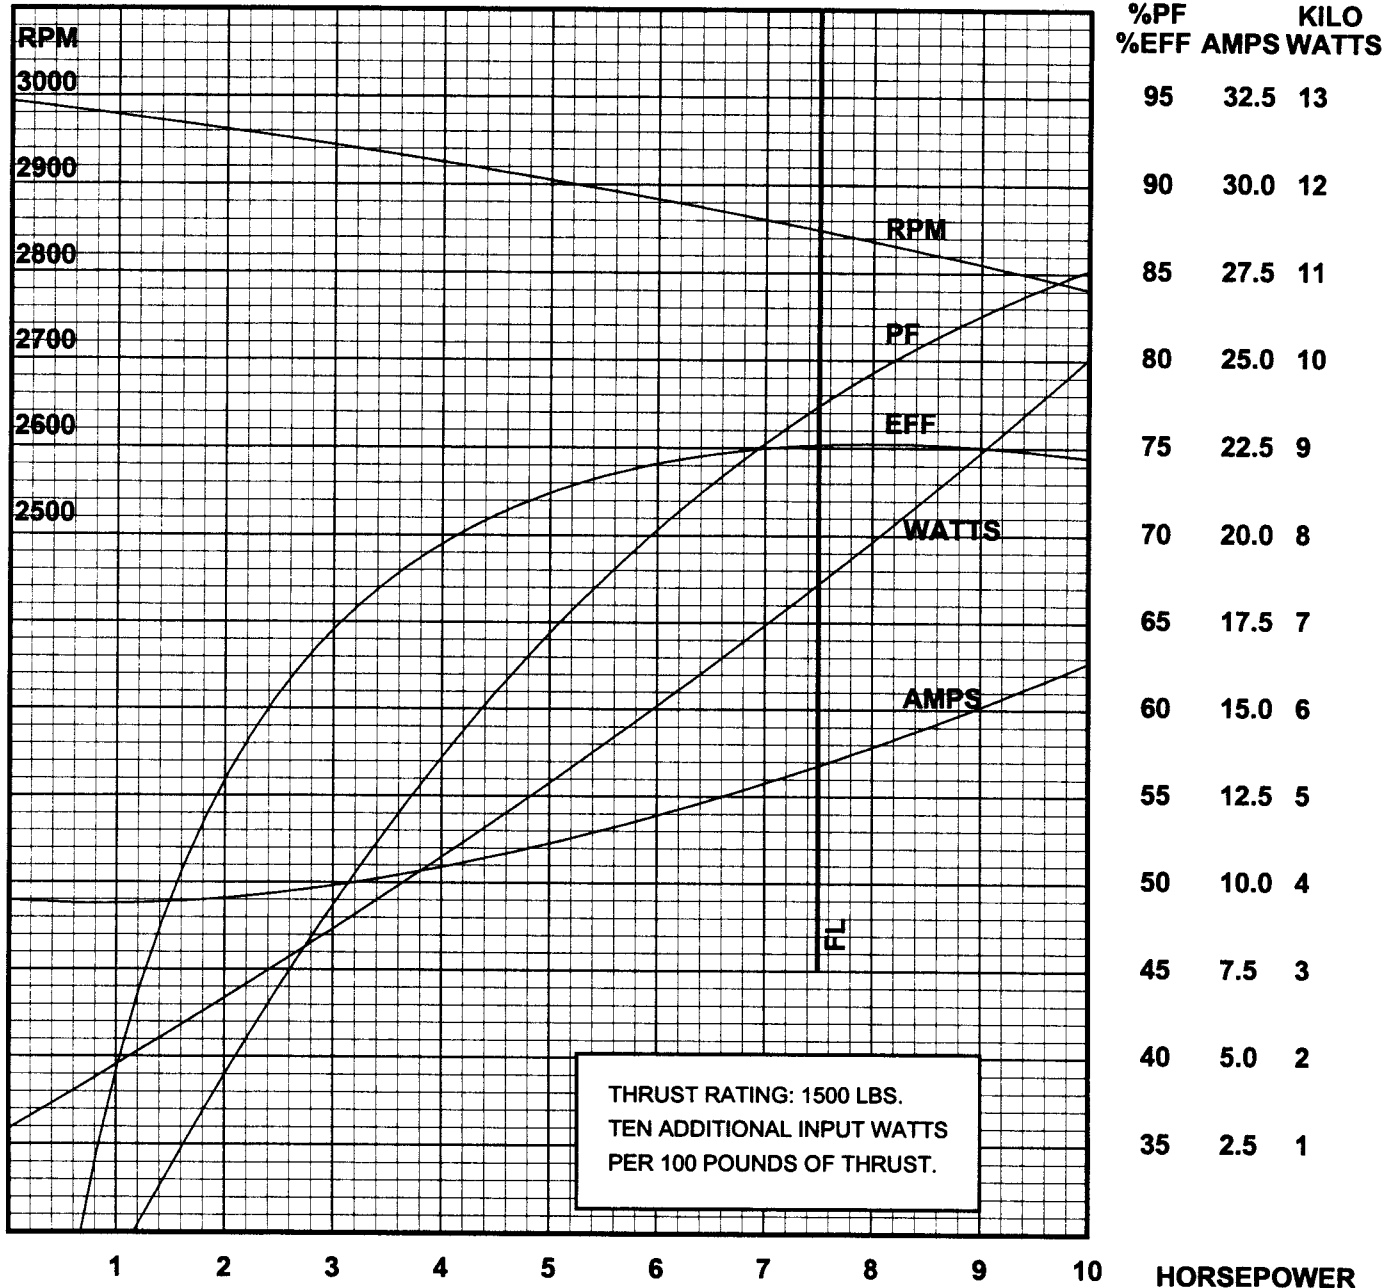

THRUST RATING: 1500 LBS.  
TEN ADDITIONAL INPUT WATTS  
PER 100 POUNDS OF THRUST.

	1	2	3	4	5	6	7	8	9	10	HORSEPOWER
FULL LOAD TORQUE			166								LB-IN
BREAKDOWN TORQUE			543								LB-IN
LOCKED ROTOR TORQUE			507								LB-IN
LOCKED ROTOR AMPS			75.9								

CURVE NO. 336910-701