


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS 415	HERTZ 50	R A T I N G	FRAME 4 INCH SUB	HP 2
	ST.MFD	RUN MFD		MODEL 234325	VOLTS 380-415
	TEST PR 8189	PAGE 4-G		RPM 2875	PHASE 3
	APPR BY MEM	DATE 8/12/97		S.F. 1.00	HERTZ 50
			TYPE 3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
 TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

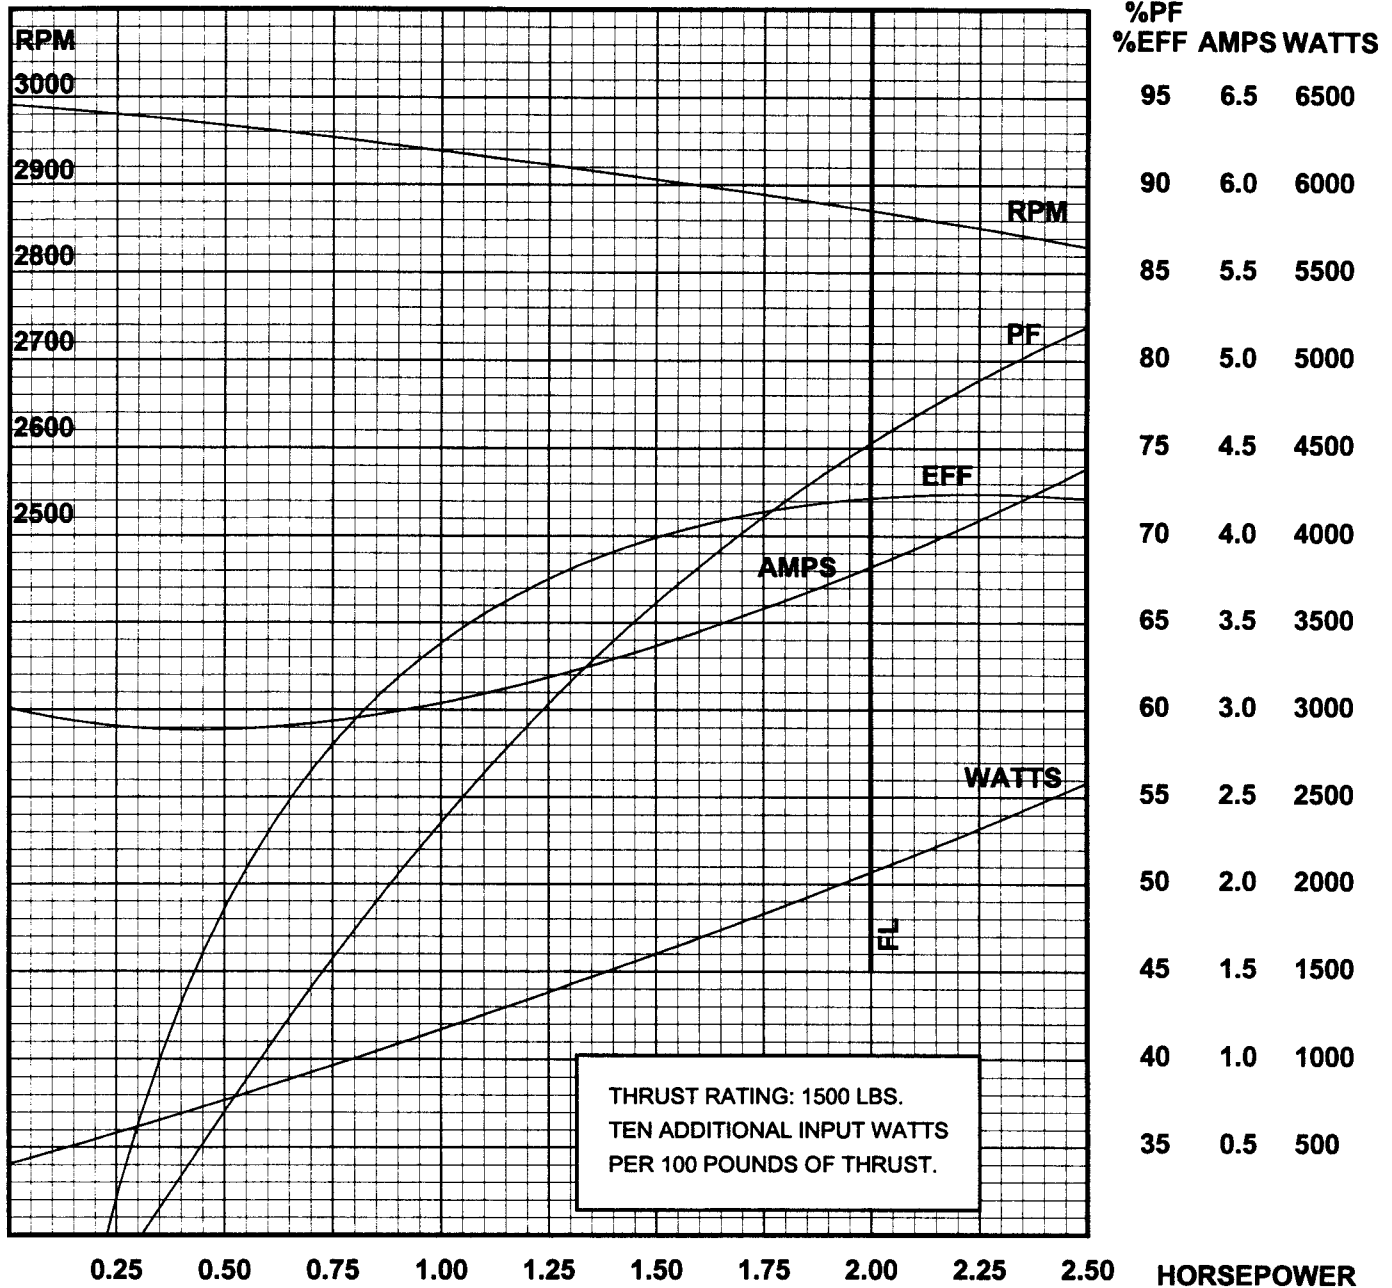

FULL LOAD TORQUE	43.9	LB-IN
BREAKDOWN TORQUE	152	LB-IN
LOCKED ROTOR TORQUE	141	LB-IN
LOCKED ROTOR AMPS	22.6	

CURVE NO. 336980-701