


## MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8269	PAGE	5
	APPR BY		DATE	

<b>R A T I N G</b>	FRAME	4 INCH SUB	HP	.5
	MODEL	234561	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

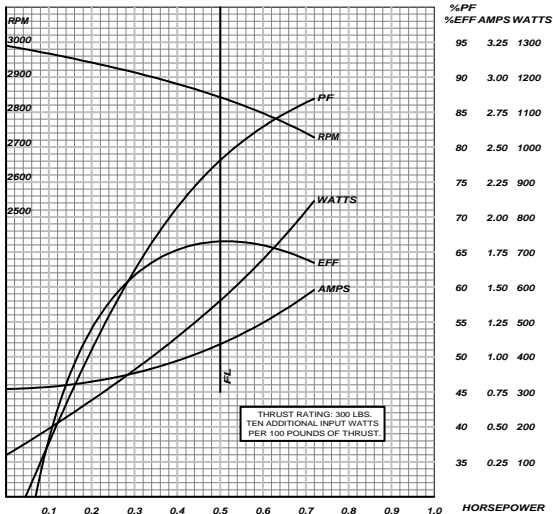

FULL LOAD TORQUE 11.1 LB-IN  
 BREAKDOWN TORQUE 25.5 LB-IN  
 LOCKED ROTOR TORQUE 20.3 LB-IN  
 LOCKED ROTOR AMPS 4.5