




## MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8269	PAGE	5-B
	APPR BY		DATE	

R A T I N G	FRAME	4 INCH SUB	HP	.5
	MODEL	234561	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

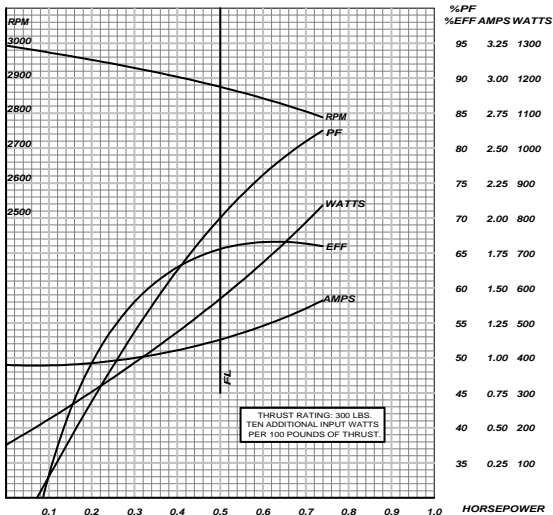

FULL LOAD TORQUE	11.0	LB-IN
BREAKDOWN TORQUE	29.9	LB-IN
LOCKED ROTOR TORQUE	24.4	LB-IN
LOCKED ROTOR AMPS	4.9	

CURVE NO. 337604-202