


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8270	PAGE	6
	APPR BY		DATE	

R A T I N G	FRAME	4 INCH SUB	HP	.75
	MODEL	234562	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

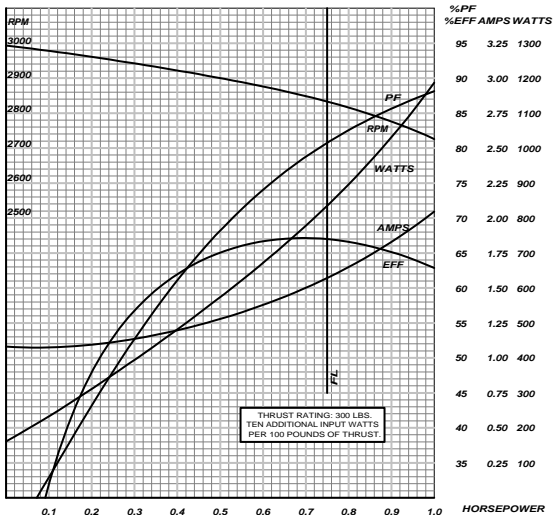

FULL LOAD TORQUE 16.7 LB-IN
 BREAKDOWN TORQUE 32.3 LB-IN
 LOCKED ROTOR TORQUE 27.5 LB-IN
 LOCKED ROTOR AMPS 6.0