


## MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8270	PAGE	6-B
	APPR BY		DATE	

<b>R A T I N G</b>	FRAME	4 INCH SUB	HP	.75
	MODEL	234562	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

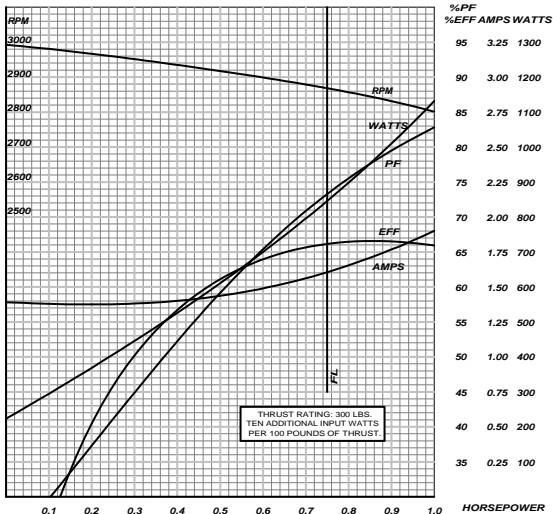

FULL LOAD TORQUE	16.5	LB-IN
BREAKDOWN TORQUE	39.0	LB-IN
LOCKED ROTOR TORQUE	33.1	LB-IN
LOCKED ROTOR AMPS	6.6	