


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8272	PAGE	4-X
	APPR BY		DATE	

R A T I N G	FRAME	4 INCH SUB	HP	1.5
	MODEL	234524	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

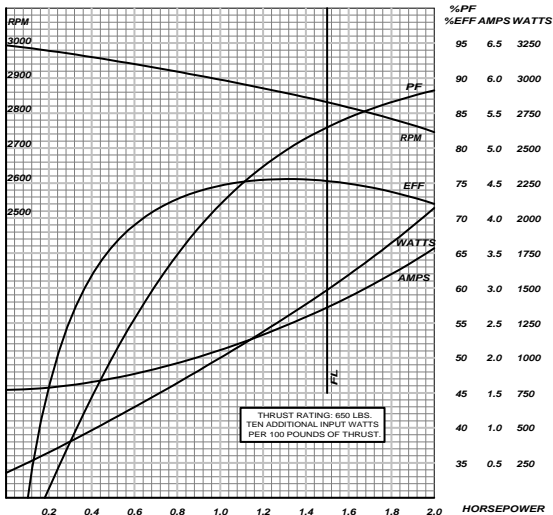

FULL LOAD TORQUE	33.4	LB-IN
BREAKDOWN TORQUE	88.2	LB-IN
LOCKED ROTOR TORQUE	83.0	LB-IN
LOCKED ROTOR AMPS	13.9	