




MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8272	PAGE	4-AX
	APPR BY		DATE	

R A T I N G	FRAME	4 INCH SUB	HP	1.5
	MODEL	234524	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

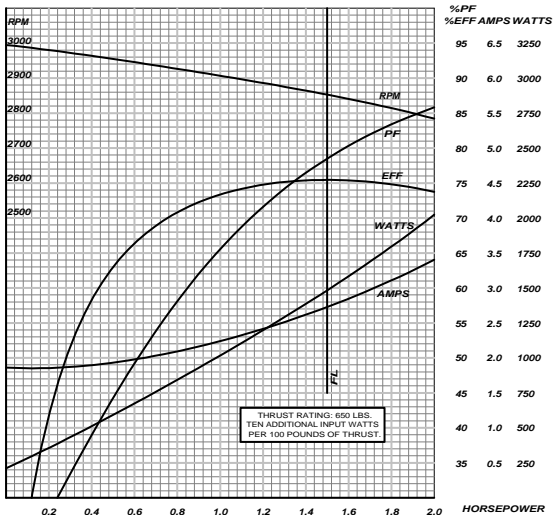

FULL LOAD TORQUE	33.1	LB-IN
BREAKDOWN TORQUE	98.7	LB-IN
LOCKED ROTOR TORQUE	92.5	LB-IN
LOCKED ROTOR AMPS	14.9	

CURVE NO. 337607-701