




Franklin Electric

MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	400	HERTZ	50
E	ST. MFD		RUN MFD	
S	TEST PR	8285	PAGE	3-A
T	APPR BY	Jal	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	2
A	MODEL	234525	VOLTS	380-415
T	RPM	2875	PHASE	3
I	S.F.	1.00	HERTZ	50
N	TYPE	3 PHASE		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

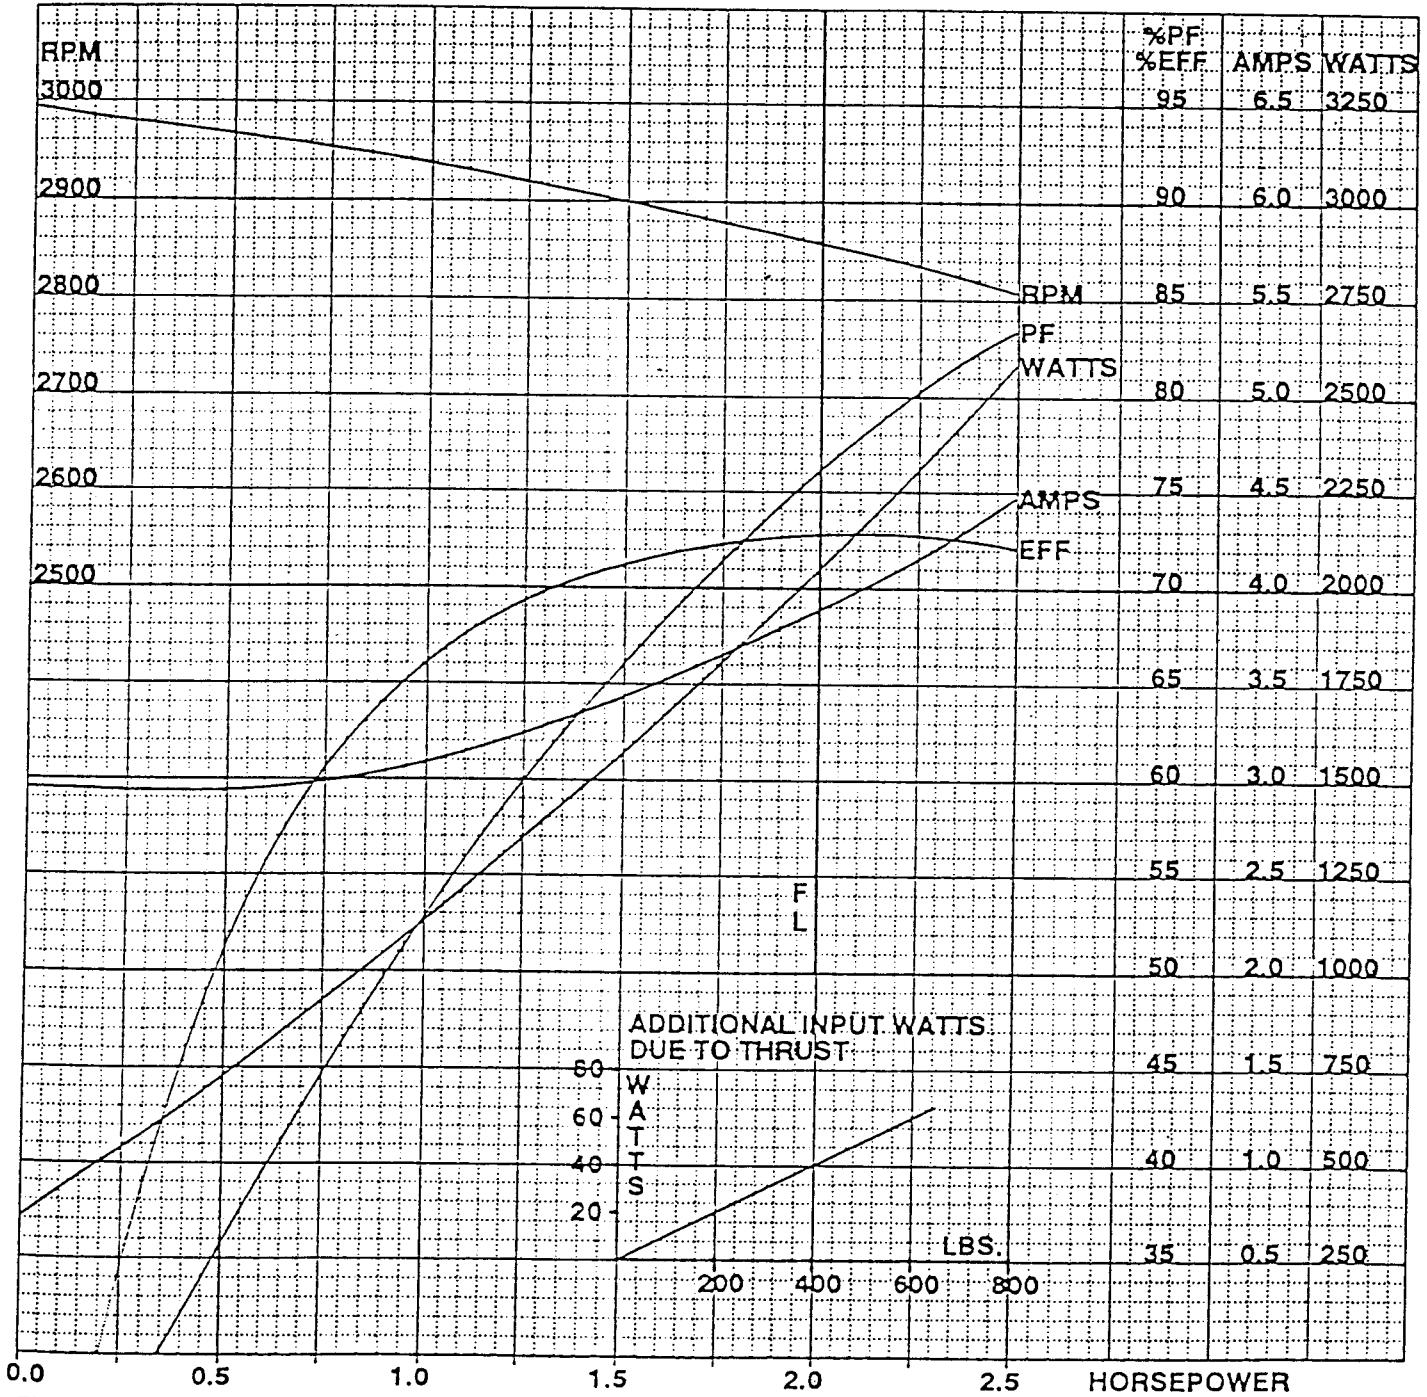

FULL LOAD TORQUE 44.1 LB-IN
 BREAKDOWN TORQUE 120 LB-IN
 LOCKED ROTOR TORQUE 112 LB-IN
 LOCKED ROTOR AMPS 19.2

CURVE NO. 337608-701