




# MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	415	HERTZ	50
E	ST. MFD		RUN MFD	
S	TEST PR	8279	PAGE	5-B
T	APPR BY	<i>JW</i>	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	3
A	MODEL	234526	VOLTS	380-415
T	RPM	2875	PHASE	3
I	S.F.	1.00	HERTZ	50
N	TYPE	3 PHASE		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

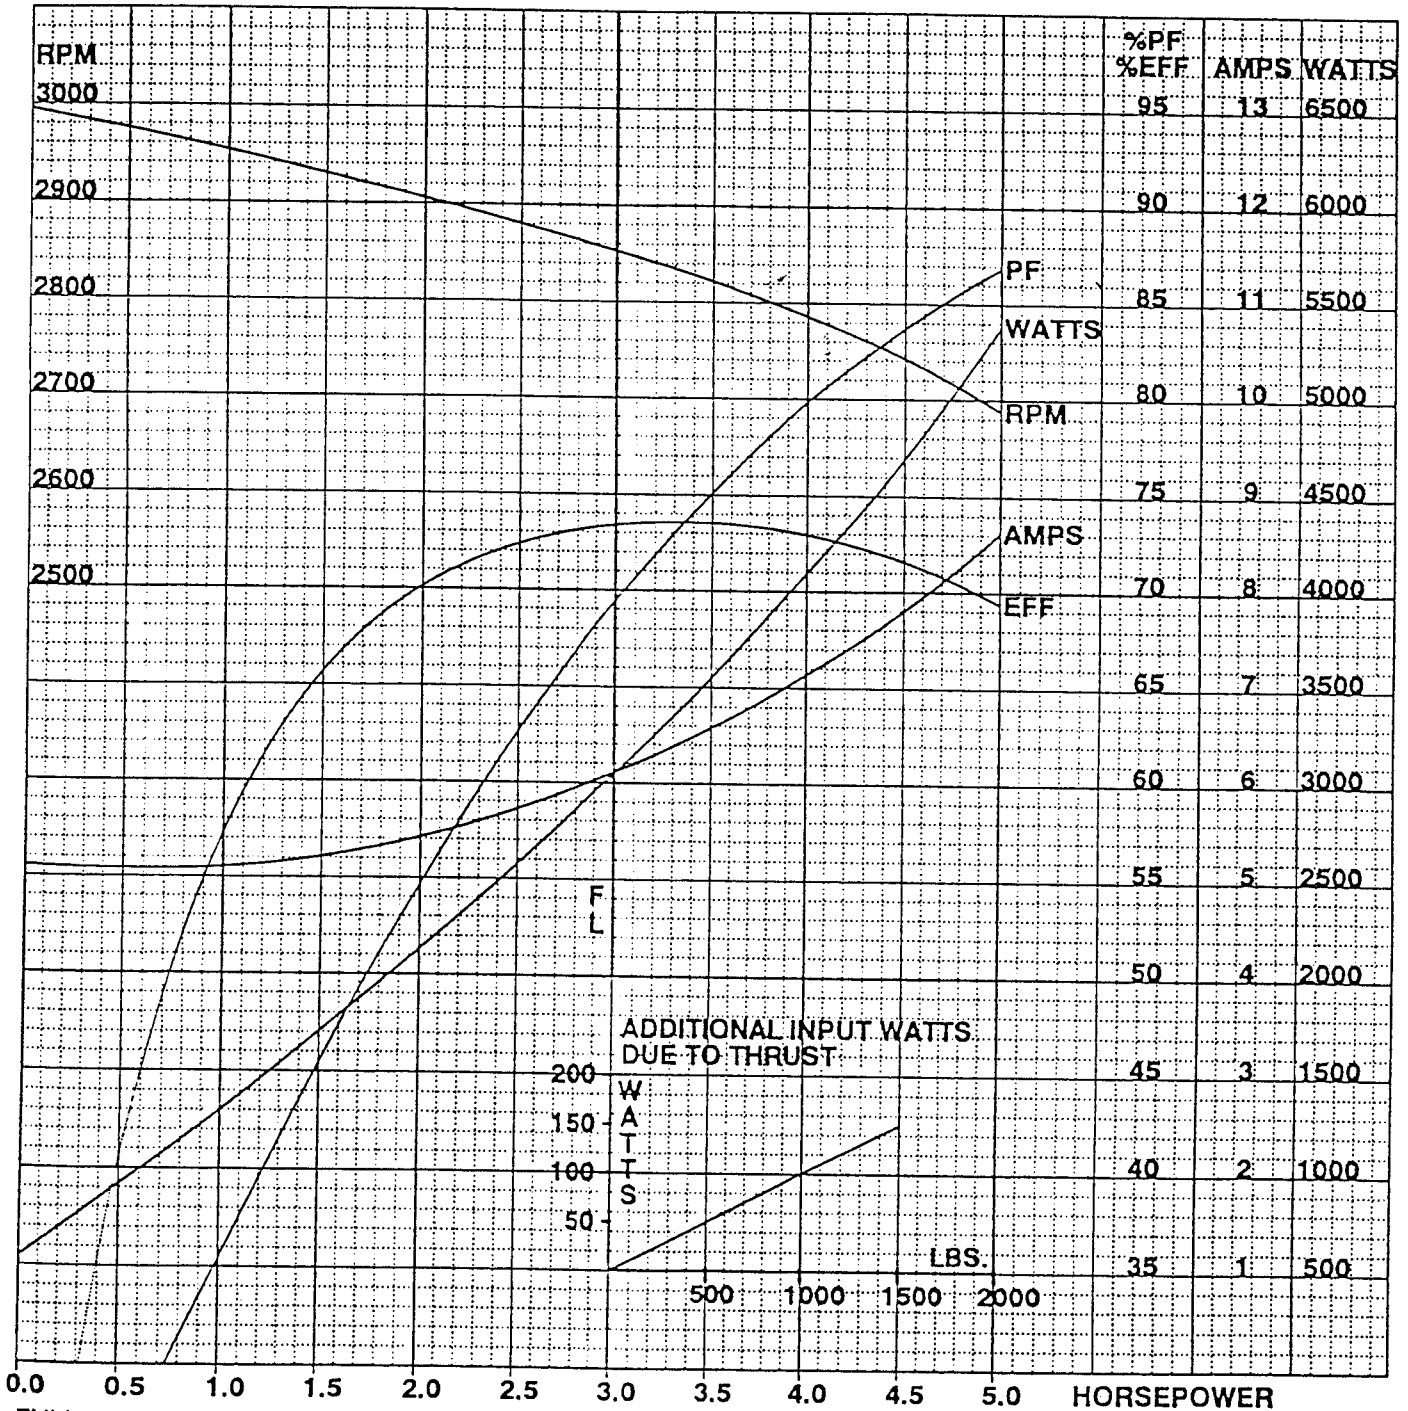

FULL LOAD TORQUE 66.3 LB-IN  
 BREAKDOWN TORQUE 206 LB-IN  
 LOCKED ROTOR TORQUE 230 LB-IN  
 LOCKED ROTOR AMPS 30.8

CURVE NO. 337609-702