




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	415	HERTZ	50
E	ST. MFD		RUN MFD	
S	TEST PR	8295	PAGE	7-F
T	APPR BY	JH	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	5
A	MODEL	234527	VOLTS	380-415
T	RPM	2875	PHASE	3
I	S.F.	1	HERTZ	50
N	TYPE	3 PHASE		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

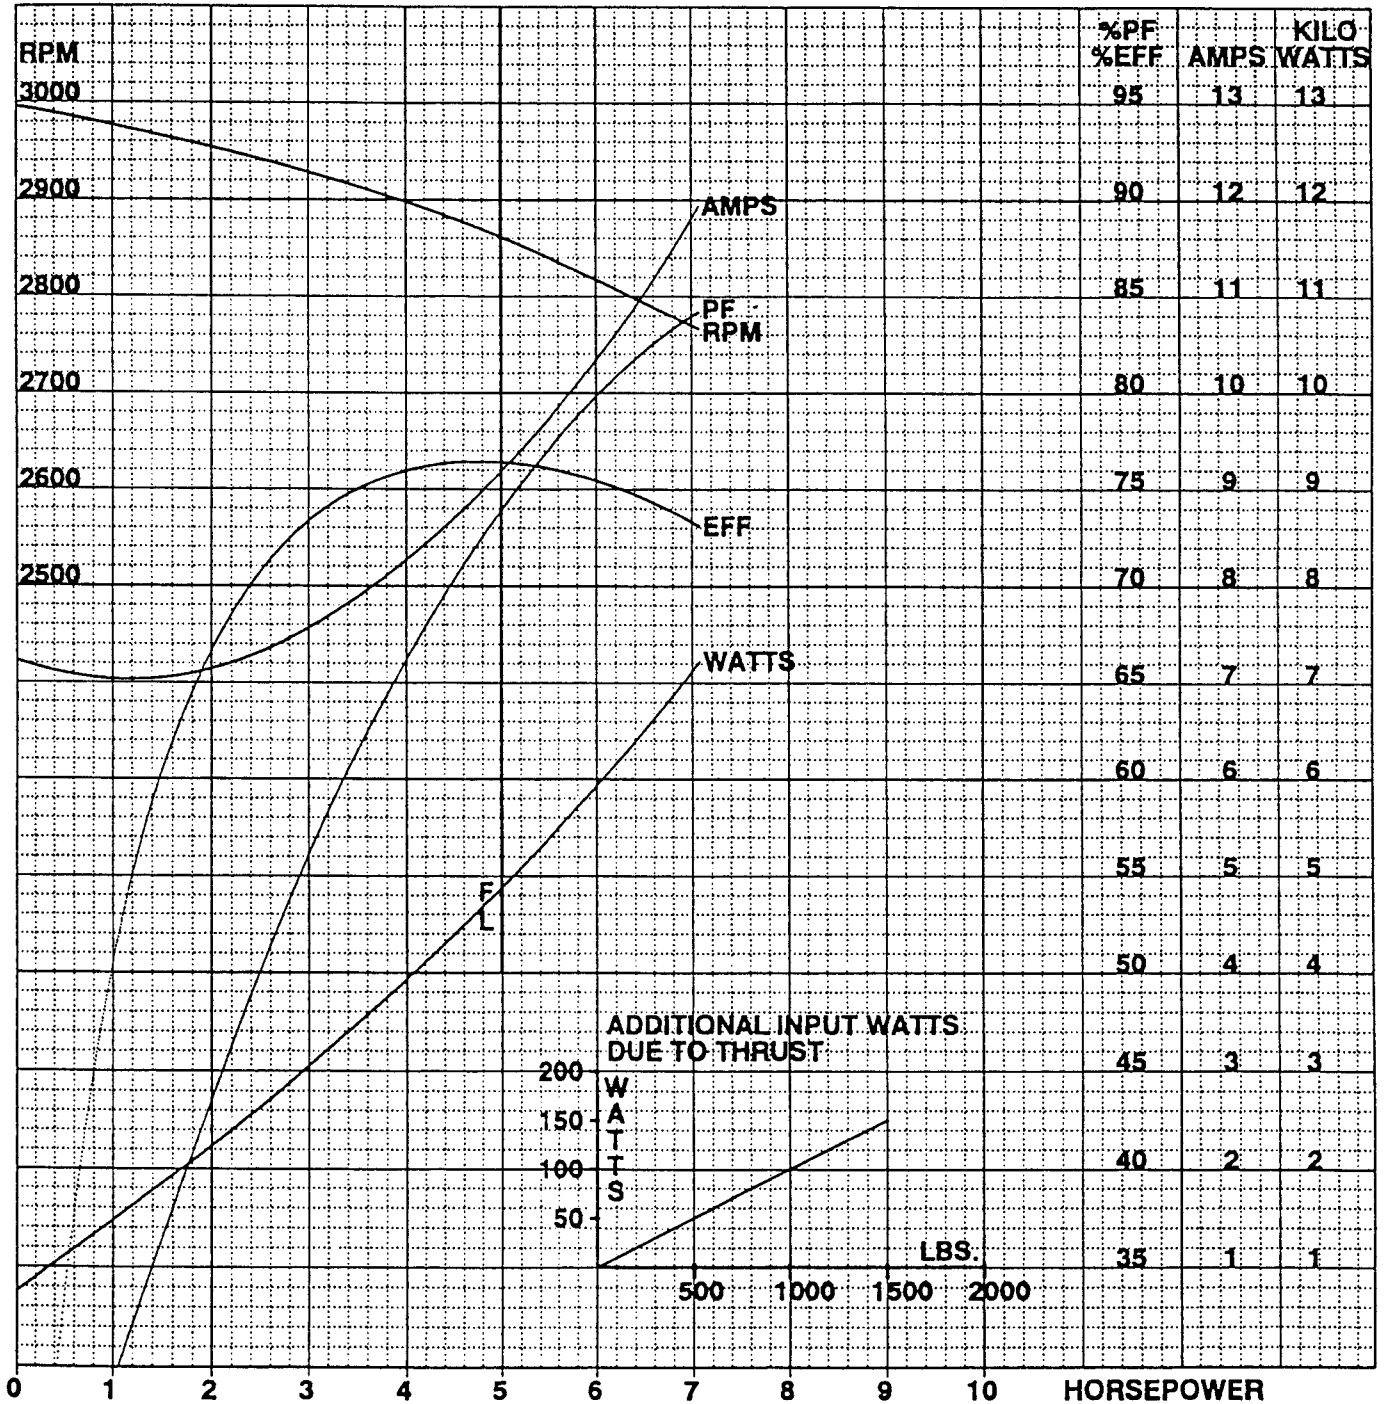

FULL LOAD TORQUE 110.1 LB-IN
 BREAKDOWN TORQUE 345 LB-IN
 LOCKED ROTOR TORQUE 370 LB-IN
 LOCKED ROTOR AMPS 50

CURVE NO. 337610-702