




MOTOR PERFORMANCE CHARACTERISTICS

TEST APPR BY	VOLTS	400	HERTZ	50	RATING	FRAME	4 INCH SUB	HP	7.5
	ST. MFD		RUN MFD			MODEL	234528	VOLTS	380-415
	TEST PR	8296	PAGE	8-D		RPM	2875	PHASE	3
	APPR BY	<i>JW</i>	DATE	4-15-93		S.F.	1	HERTZ	50
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

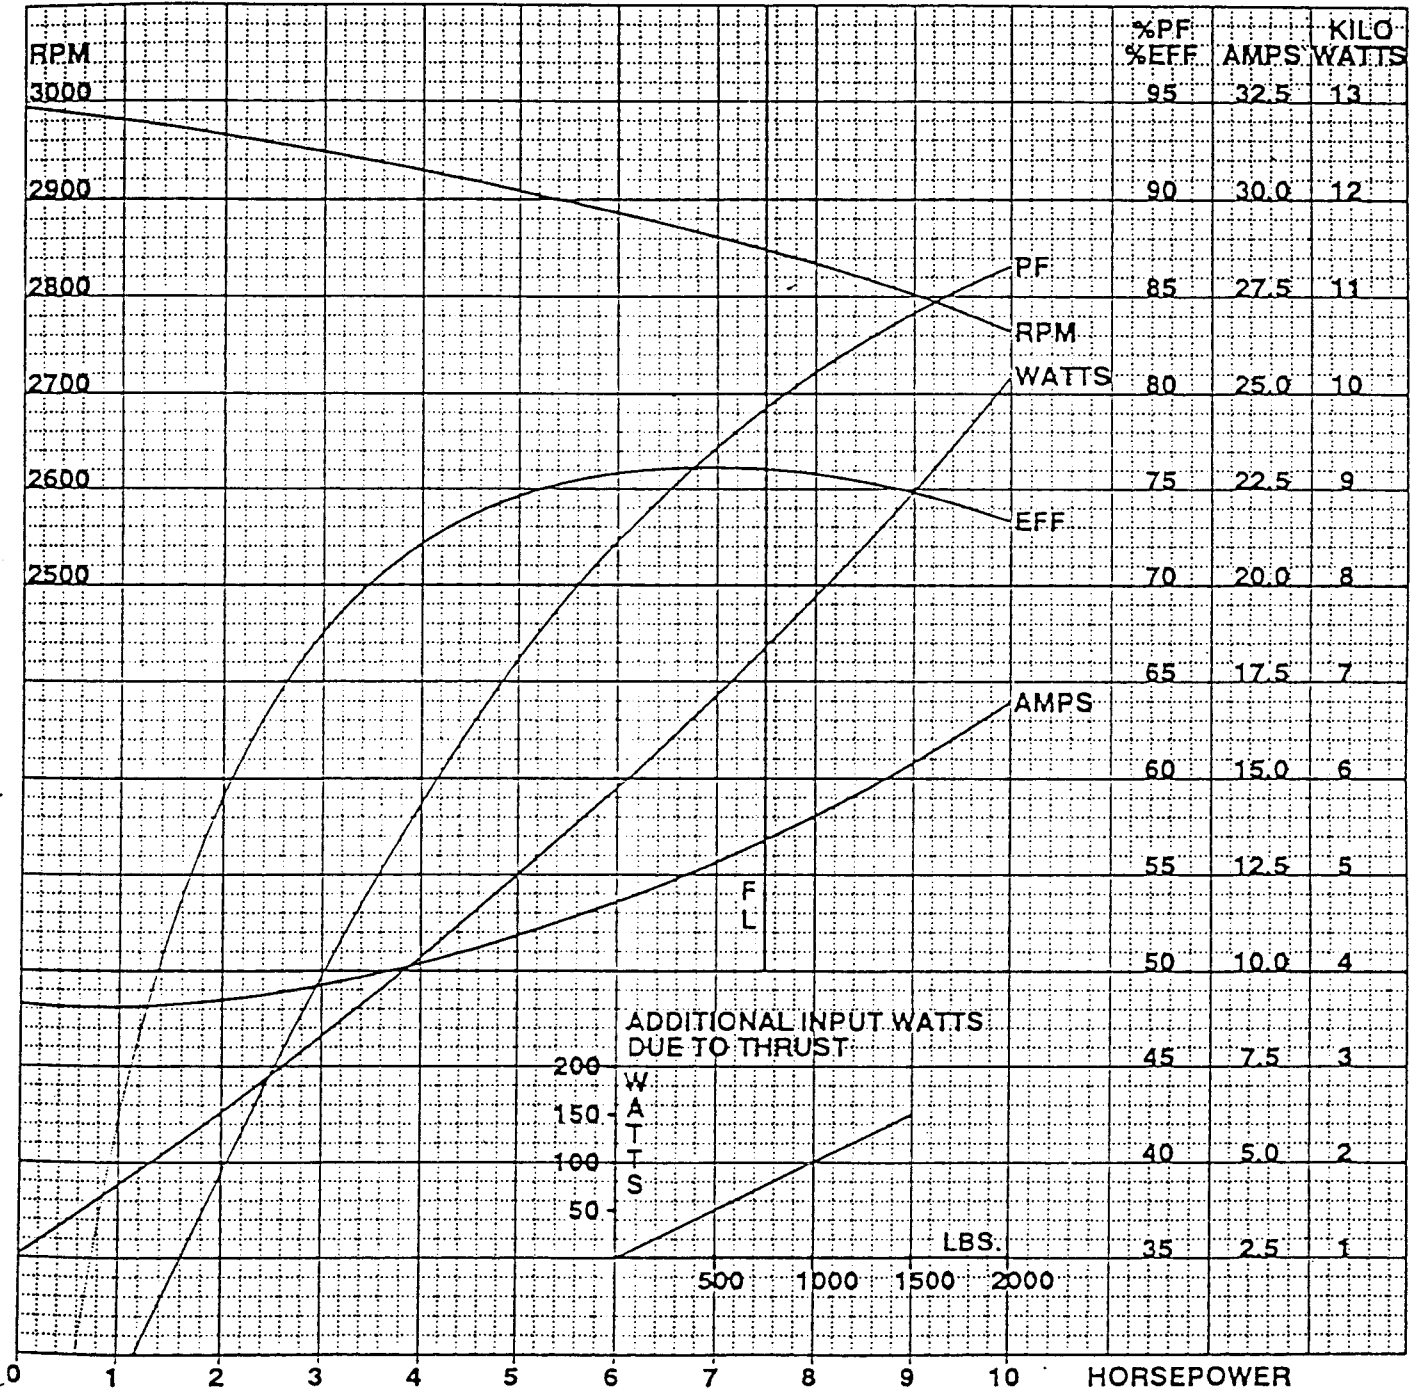

FULL LOAD TORQUE 166.0 LB-IN
 BREAKDOWN TORQUE 530 LB-IN
 LOCKED ROTOR TORQUE 460 LB-IN
 LOCKED ROTOR AMPS 76

CURVE NO. 337611-701