




Franklin Electric

# MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	380	HERTZ	50
E	ST. MFD		RUN MFD	
S	TEST PR	8307	PAGE	6
T	APPR BY	JW	DATE	5-5-93

R	FRAME	4 INCH SUB	HP	4
A	MODEL	234591	VOLTS	380-415
T	RPM	2875	PHASE	3
I	S.F.	1.00	HERTZ	50
N	TYPE	3 PHASE		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

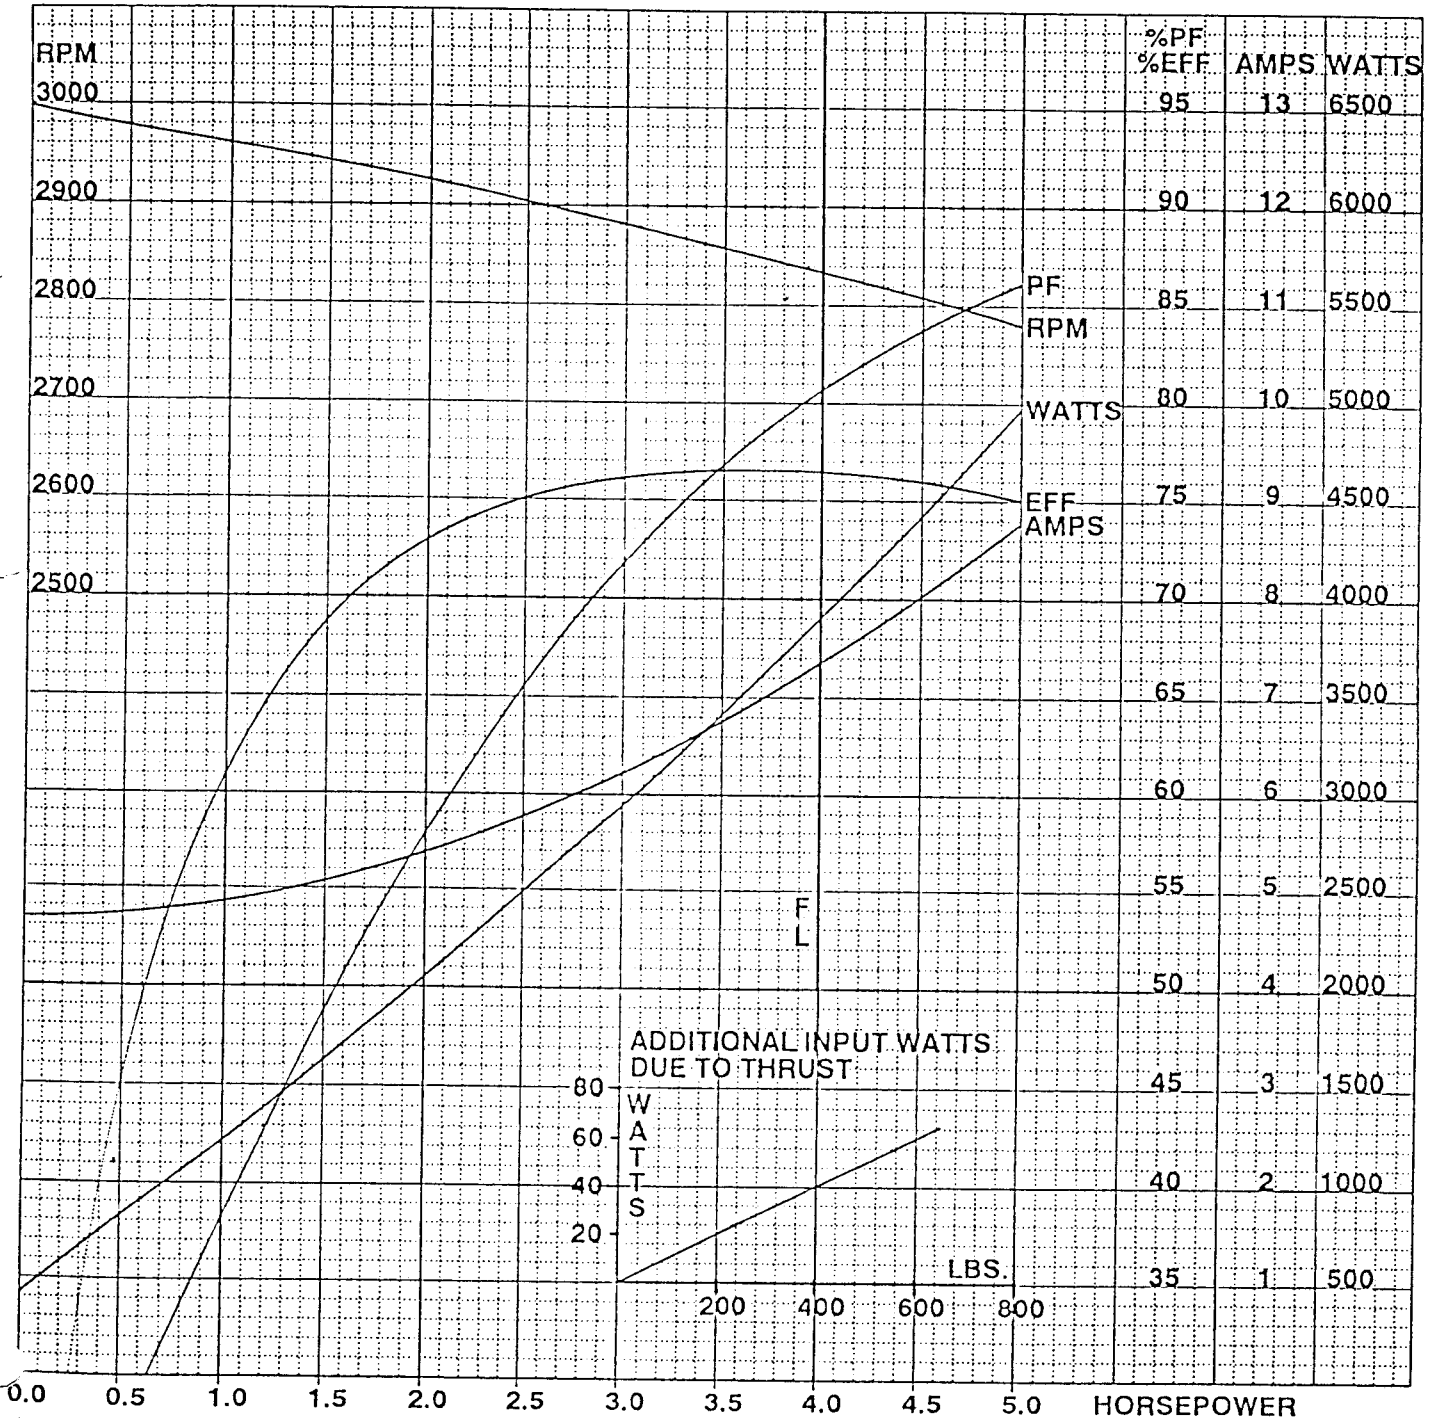

FULL LOAD TORQUE 89.0 LB-IN  
 BREAKDOWN TORQUE 260 LB-IN  
 LOCKED ROTOR TORQUE 245 LB-IN  
 LOCKED ROTOR AMPS 39.9

CURVE NO. 337930-300