




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	415	HERTZ	50
E	ST. MFD		RUN MFD	
S	TEST PR	8307	PAGE	5-D
T	APPR BY	JW	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	4
A	MODEL	234591	VOLTS	380-415
T	RPM	2875	PHASE	3
I	S.F.	1	HERTZ	50
N	TYPE	3 PHASE		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

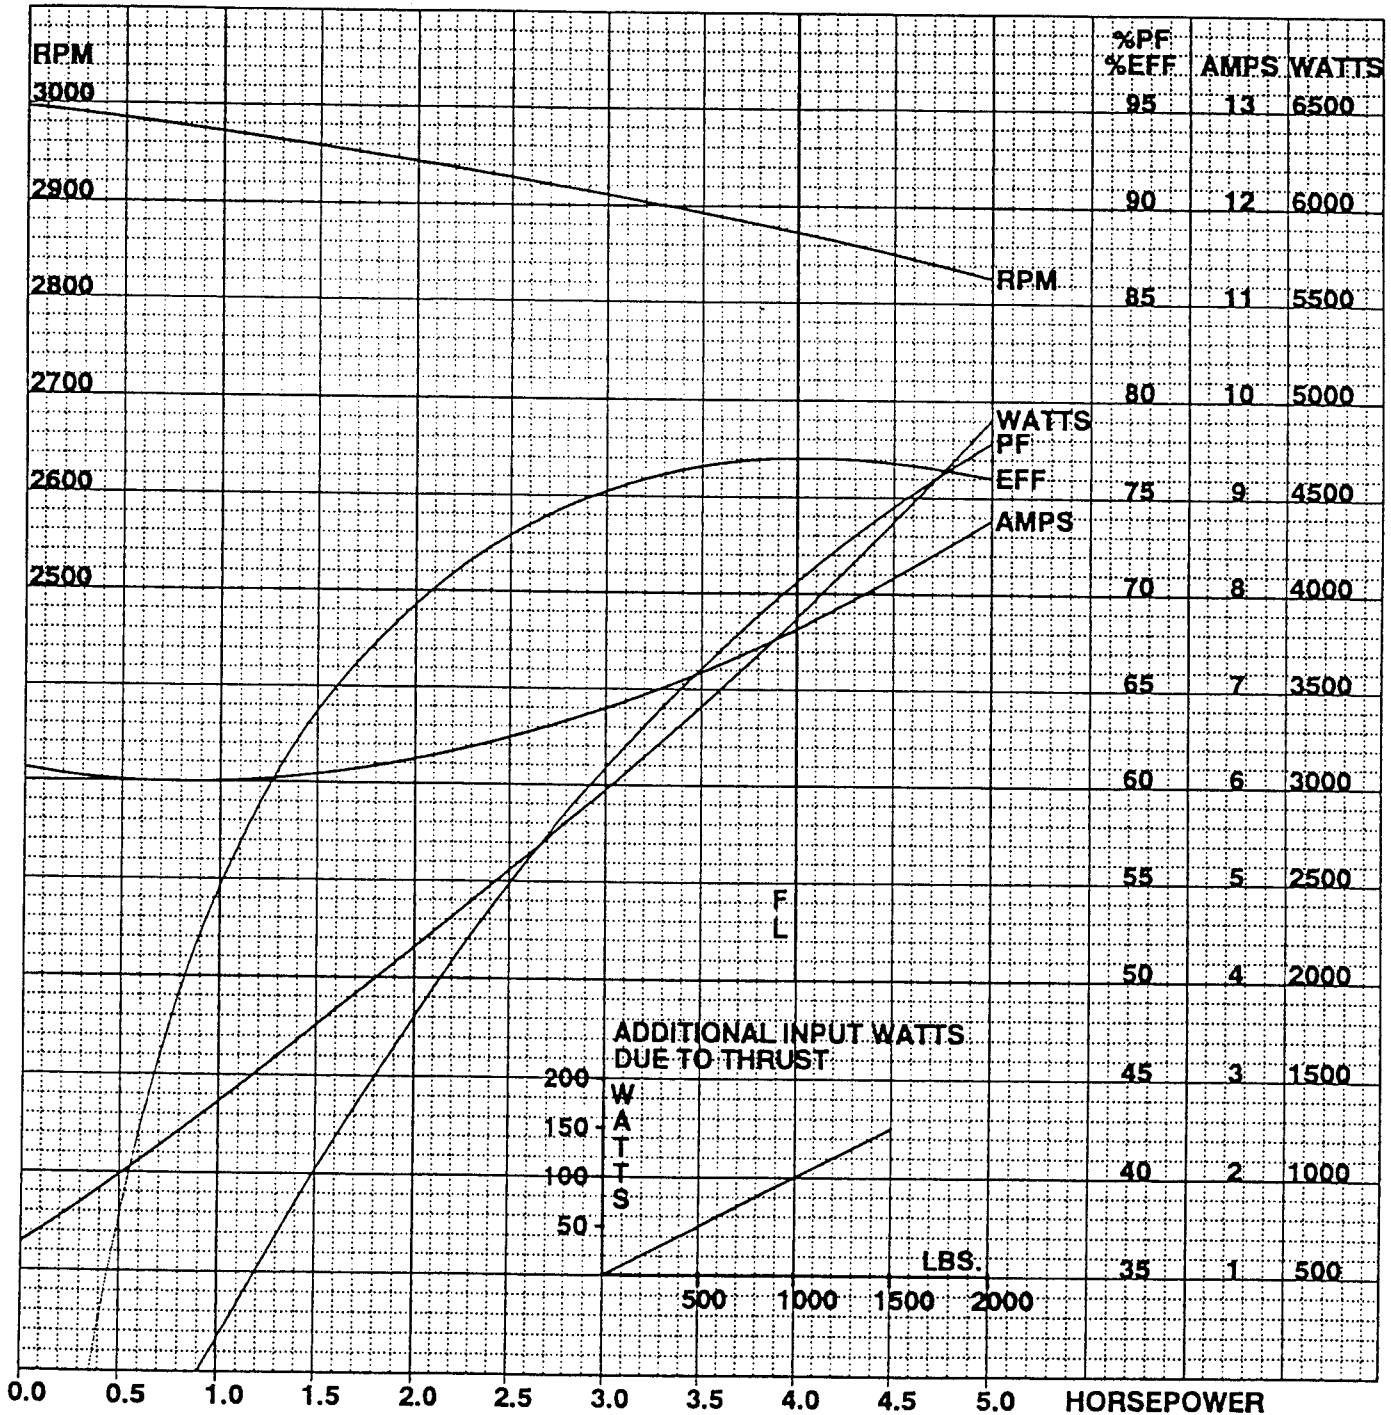

FULL LOAD TORQUE 87.8 LB-IN
 BREAKDOWN TORQUE 308 LB-IN
 LOCKED ROTOR TORQUE 325 LB-IN
 LOCKED ROTOR AMPS 44

CURVE NO. 337930-702