




MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50
	ST. MFD		RUN MFD	
	TEST PR	8312	PAGE	8
	APPR BY	MEM	DATE	12/10/96

RATING	FRAME	4 INCH SUB	HP	10
	MODEL	234597	VOLTS	415
	RPM	2875	PHASE	3
	S.F.	1.0	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

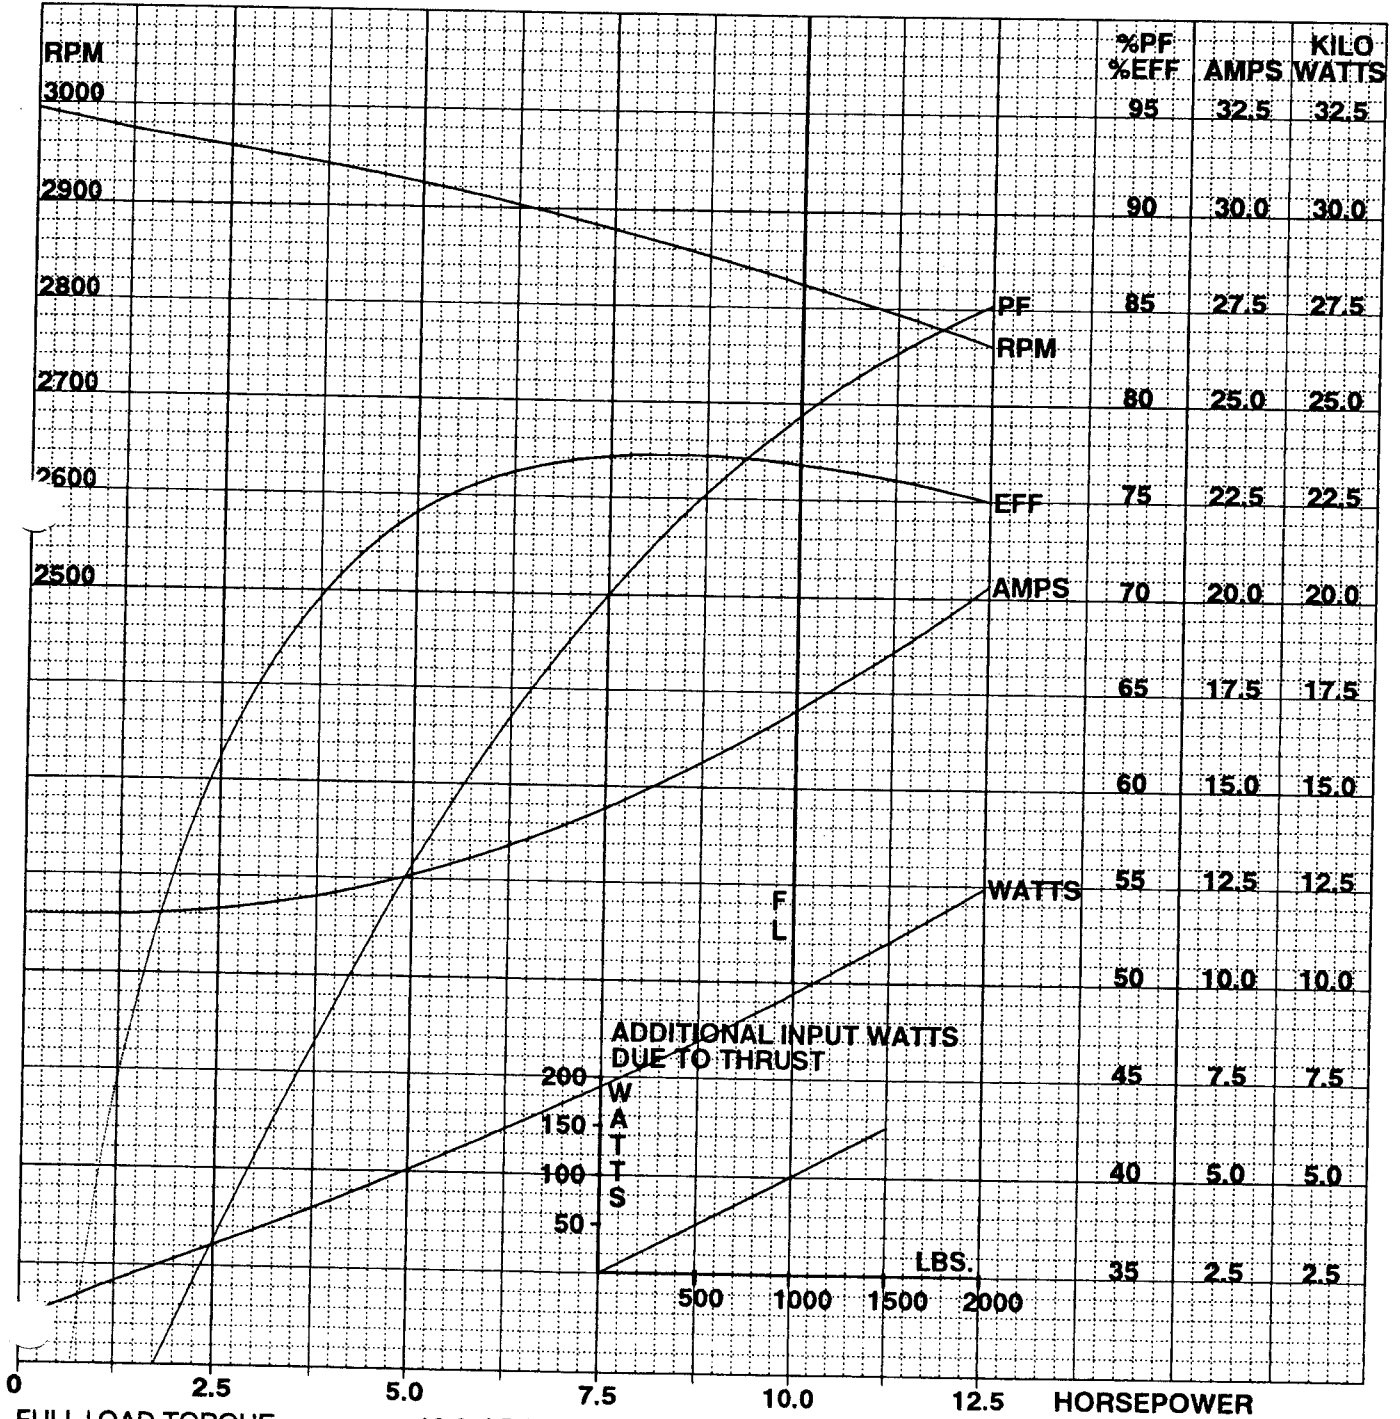

FULL LOAD TORQUE 18.6 LB-FT
 BREAKDOWN TORQUE 53.0 LB-FT
 LOCKED ROTOR TORQUE 59.9 LB-FT
 LOCKED ROTOR AMPS 95.8

CURVE NO. 338215-700