


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	220	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8356	PAGE	1
	APPR BY		DATE	

R A T I N G	FRAME	4 INCH SUB	HP	.75
	MODEL	244557	VOLTS	220
	RPM	2875	PHASE	1
	S.F.	1.00	HERTZ	50
	TYPE	SPIR		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.
LOCKED ROTOR DATA FROM CALCULATION

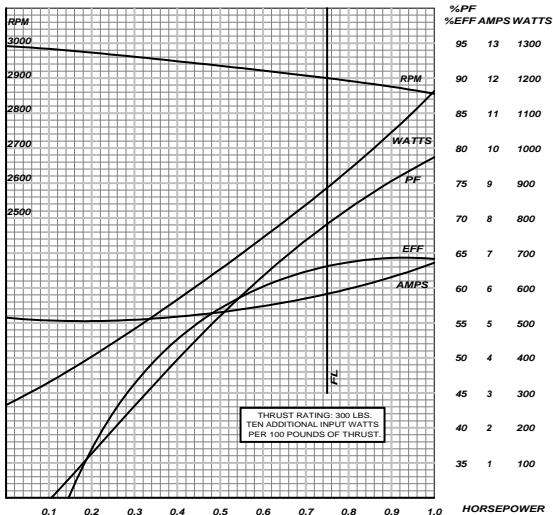

FULL LOAD TORQUE	16.3	LB-IN
BREAKDOWN TORQUE	40.8	LB-IN
LOCKED ROTOR TORQUE	16.7	LB-IN
LOCKED ROTOR AMPS	36.1	