




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	230	HERTZ	50
E	ST. MFD	95	RUN MFD	
S	TEST PR	8371	PAGE	1
T	APPR BY	<i>JN</i>	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	1
A	MODEL	214568	VOLTS	230
T	RPM	2875	PHASE	1
I	S.F.	1.00	HERTZ	50
N	TYPE	CSIR		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

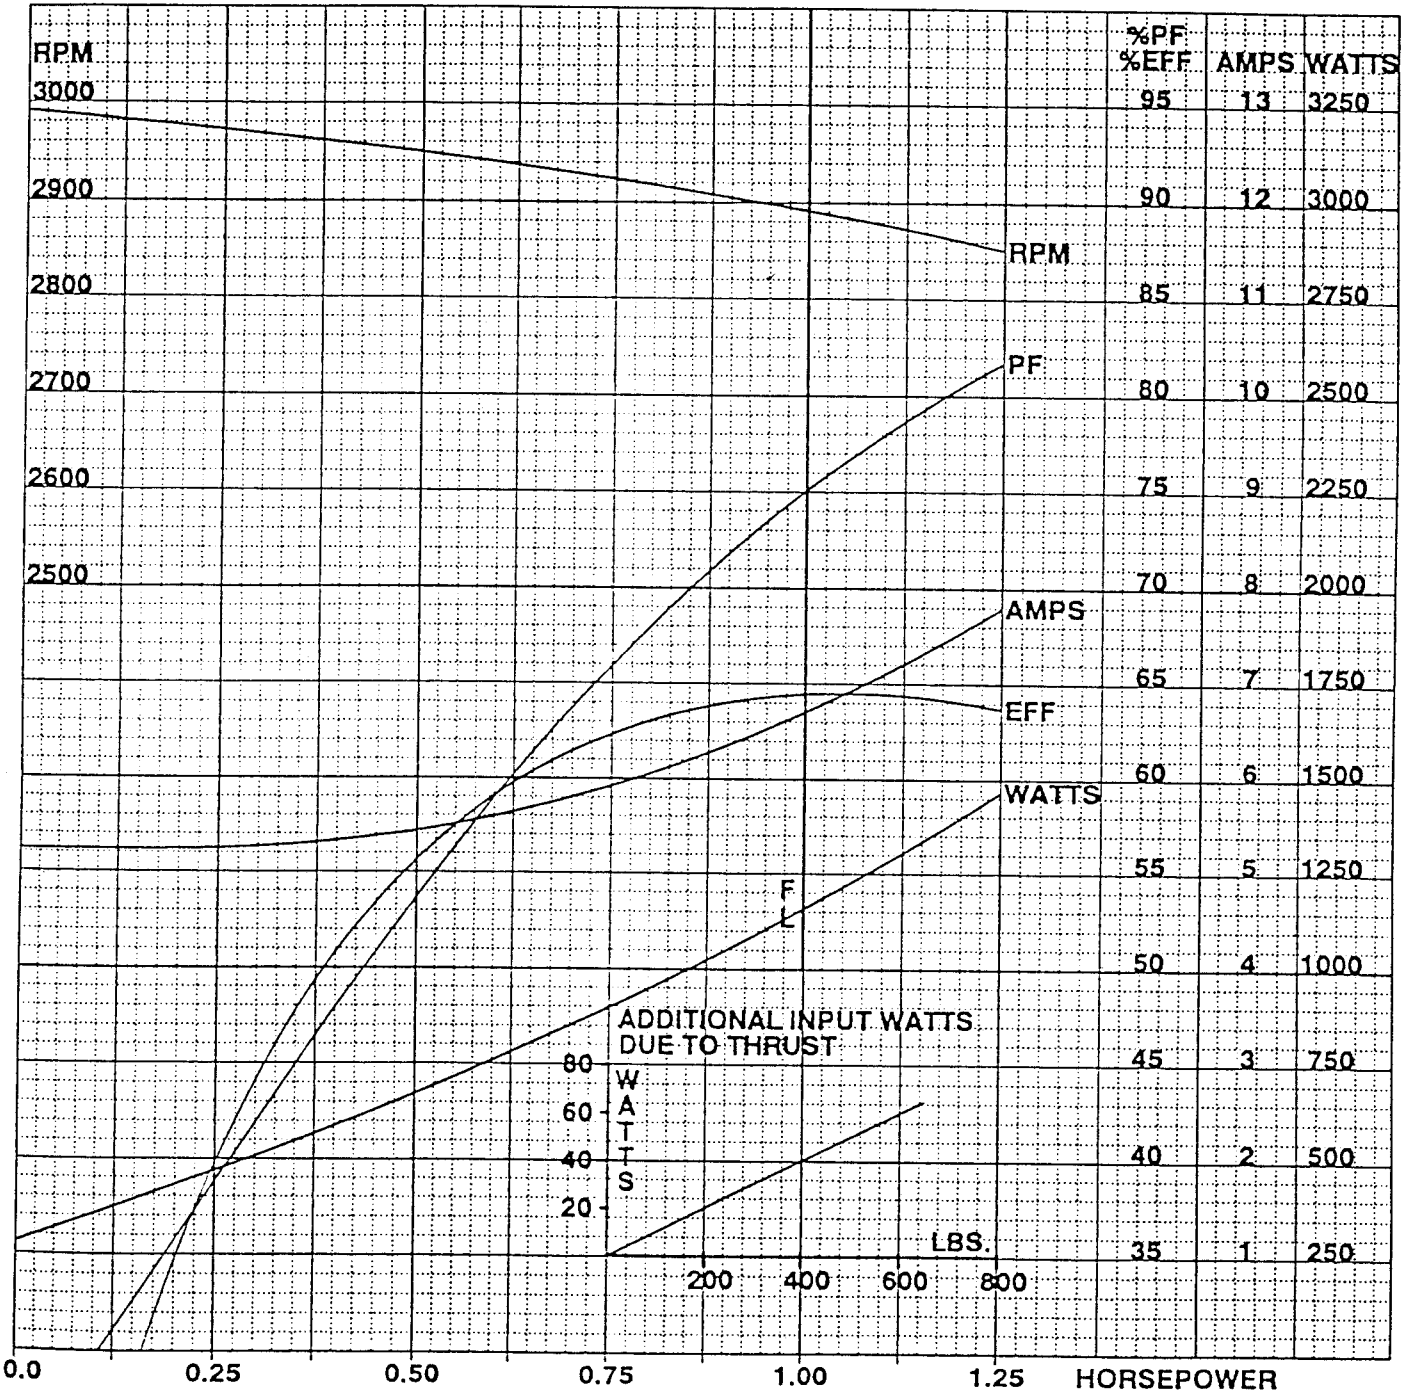

FULL LOAD TORQUE 21.8 LB-IN
 BREAKDOWN TORQUE 46.2 LB-IN
 LOCKED ROTOR TORQUE 36.4 LB-IN
 LOCKED ROTOR AMPS 28.3

CURVE NO. 338451-300