




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	230	HERTZ	50	R	FRAME	4 INCH SUB	HP	1.5
E	ST. MFD	120	RUN MFD	10	A	MODEL	224560	VOLTS	230
S	TEST PR	8408	PAGE	1	T	RPM	2875	PHASE	1
T	APPR BY	<i>JW</i>	DATE	4-15-93	I	S.F.	1	HERTZ	50
					N	TYPE	CSCR		
					G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

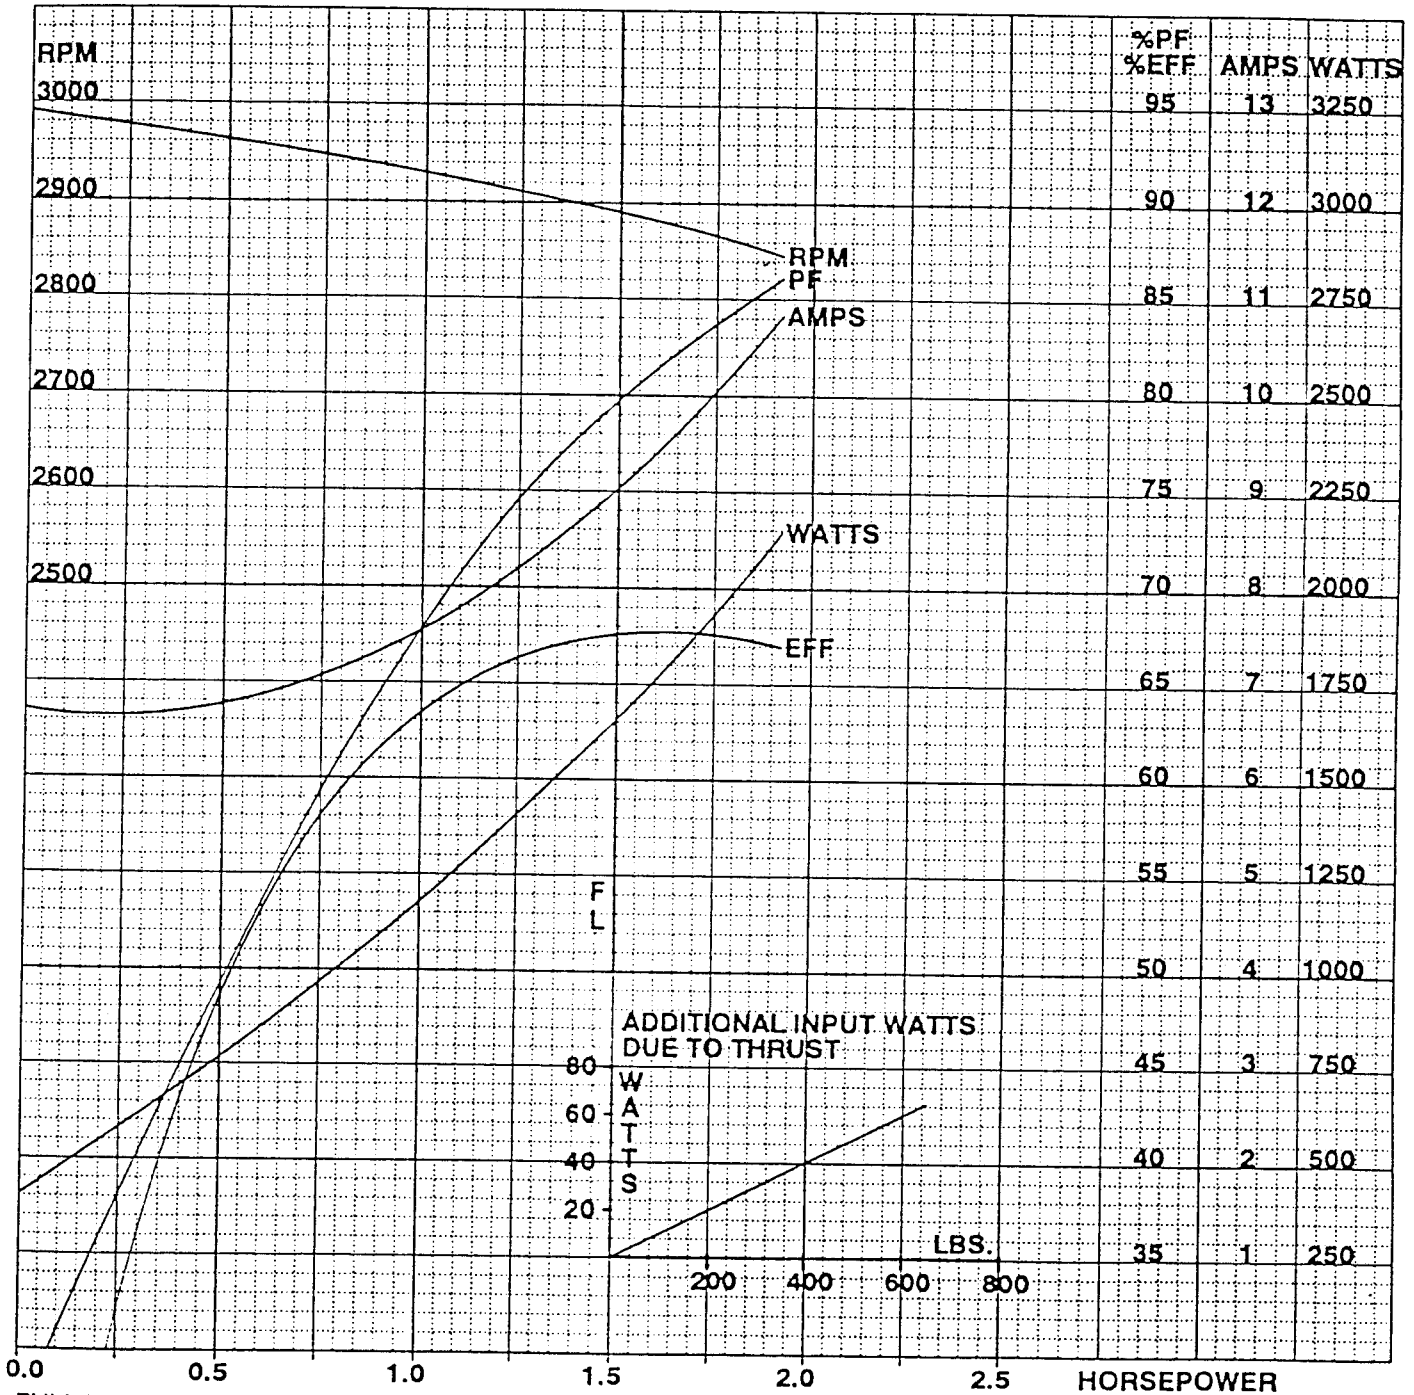

FULL LOAD TORQUE 32.7 LB-IN
 BREAKDOWN TORQUE 72.0 LB-IN
 LOCKED ROTOR TORQUE 53.0 LB-IN
 LOCKED ROTOR AMPS 39.6

CURVE NO. 338456-300