




MOTOR PERFORMANCE CHARACTERISTICS

T	VOLTS	230	HERTZ	50
E	ST. MFD	211	RUN MFD	20
S	TEST PR	8409	PAGE	1
T	APPR BY	<i>[Signature]</i>	DATE	4-15-93

R	FRAME	4 INCH SUB	HP	2
A	MODEL	224561	VOLTS	230
T	RPM	2875	PHASE	1
I	S.F.	1	HERTZ	50
N	TYPE	CSCR		
G				

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

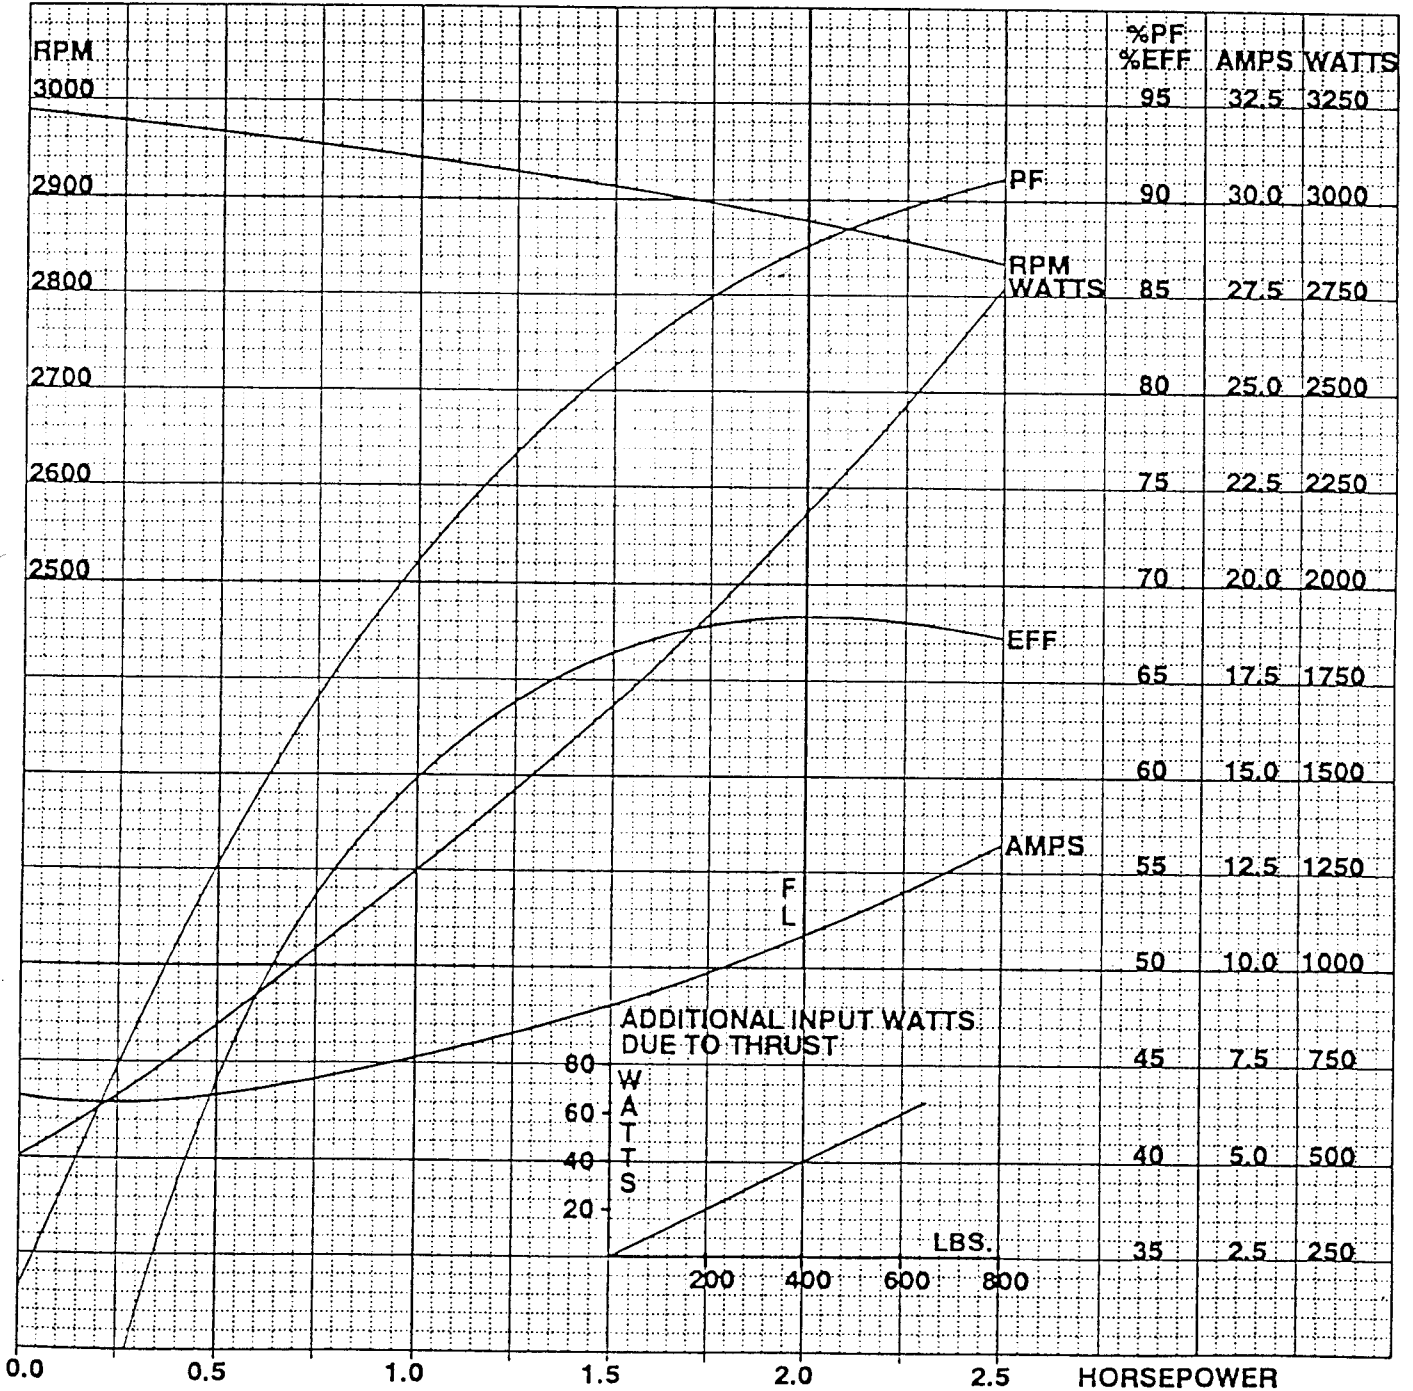

FULL LOAD TORQUE 43.8 LB-IN
 BREAKDOWN TORQUE 87.0 LB-IN
 LOCKED ROTOR TORQUE 74.0 LB-IN
 LOCKED ROTOR AMPS 53.4

CURVE NO. 338457-300